



BSP 90° Wartelkoppeling met 60° conus type B90

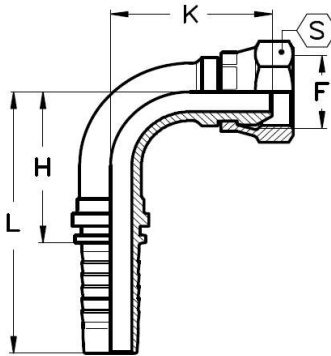

Modellen:

Bestelnummer	slangmaat	F	H	L	K	S	max. werkdruk bar*
C08B90-10	5/8	1/2	37	70	43	30	350
C10B90-10	5/8	5/8	45	80	46	30	350
C12B90-10	5/8	3/4	45	80	50	32	350
C12B90-12	3/4	3/4	54	95	56	32	350
C16B90-12	3/4	1	54	95	59	41	280
C16B90-16	1	1	70	121	72	41	280
C20B90-16	1	1 1/4	70	121	73	50	250
C20B90-20	1 1/4	1 1/4	84	142	87	50	210
C24B90-20	1 1/4	1 1/2	84	142	87	55	210
C24B90-24	1 1/2	1 1/2	100	165	100	55	185
C32B90-24	1 1/2	2	100	165	100	70	185
C32B90-32	2	2	134	204	141	70	175


BSP 90° Compacte wartelkoppeling met 60° conus type B90K



Modellen:

Bestelnummer	slangmaat	F	H	L	K	S	max. werkdruk bar*
C04B90K-04	1/4	1/4	18	46	23	19	450
C06B90K-06	3/8	3/8	21	52	26	22	445
C08B90K-08	1/2	1/2	24	57	28	27	415
C12B90K-12	3/4	3/4	31	72	35	32	350
C16B90K-16	1	1	38	89	41	41	280

BSP wartelkoppeling vlakke afdichting type BFF



Modellen:

Bestelnummer	slangmaat	F	H	L	S	max. werkdruk bar*
C04BFF-04	1/4	1/4	15	43	19	450
C06BFF-04	1/4	3/8	18	46	22	450
C06BFF-05	5/16	3/8	18	46	22	350
C06BFF-06	3/8	3/8	17	47	22	445
C08BFF-06	3/8	1/2	19	49	27	415
C08BFF-08	1/2	1/2	19	52	27	415
C12BFF-08	1/2	3/4	23	56	32	350
C12BFF-10	5/8	3/4	23	59	32	350
C12BFF-12	3/4	3/4	22	63	32	350
C16BFF-12	3/4	1	25	65	41	280
C16BFF-16	1	1	25	76	41	280
C20BFF-20	1 1/4	1 1/4	28	90	50	210

* Attentie: let ook op de maximale werkdruk van de slang.