



BSP 45° Wartelkoppeling met 60° conus type B45



Modellen:

Bestelnummer	slangmaat	F	H	L	K	S	max. werkdruk bar*
C06B45-05	5/16	3/8	41	69	19	22	350
C08B45-05	5/16	1/2	43	71	21	27	350
C04B45-06	3/8	1/4	41	72	18	19	445
C06B45-06	3/8	3/8	42	73	19	22	445
C06B45-08	1/2	3/8	49	82	22	22	415
C08B45-08	1/2	1/2	49	82	22	27	415
C10B45-08	1/2	5/8	48	82	22	30	350
C12B45-08	1/2	3/4	53	86	26	32	350
C08B45-10	5/8	1/2	54	90	24	30	350
C10B45-10	5/8	5/8	54	90	24	30	350
C12B45-10	5/8	3/4	57	93	26	32	350
C12B45-12	3/4	3/4	66	106	28	32	350
C16B45-12	3/4	1	68	108	30	41	280
C16B45-16	1	1	84	135	36	41	280
C20B45-16	1	1 1/4	85	136	37	50	250
C20B45-20	1 1/4	1 1/4	100	157	43	50	210
C24B45-20	1 1/4	1 1/2	100	157	43	55	210
C24B45-24	1 1/2	1 1/2	116	180	49	55	185
C32B45-24	1 1/2	2	116	180	49	70	185
C32B45-32	2	2	157	227	69	70	175

BSP 90° Wartelkoppeling met 60° conus type B90

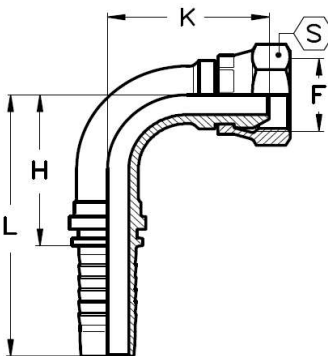

Modellen:

Bestelnummer	slangmaat	F	H	L	K	S	max. werkdruk bar*
C02B90-03	3/16	1/8	21	46	23	14	350
C04B90-03	3/16	1/4	21	46	26	19	415
C02B90-04	1/4	1/8	26	54	28	14	350
C04B90-04	1/4	1/4	26	54	28	19	450
C06B90-04	1/4	3/8	26	54	32	22	450
C08B90-04	1/4	1/2	26	54	36	27	450
C04B90-05	5/16	1/4	28	56	31	19	350
C06B90-05	5/16	3/8	28	56	34	22	350
C08B90-05	5/16	1/2	28	56	37	27	350
C04B90-06	3/8	1/4	31	61	34	19	445
C06B90-06	3/8	3/8	31	61	35	22	445
C08B90-06	3/8	1/2	31	61	38	27	415
C06B90-08	1/2	3/8	37	70	42	22	415
C08B90-08	1/2	1/2	37	70	42	27	415
C10B90-08	1/2	5/8	37	70	43	30	350
C12B90-08	1/2	3/4	37	70	42	27	350

* Attentie: let ook op de maximale werkdruk van de slang.